


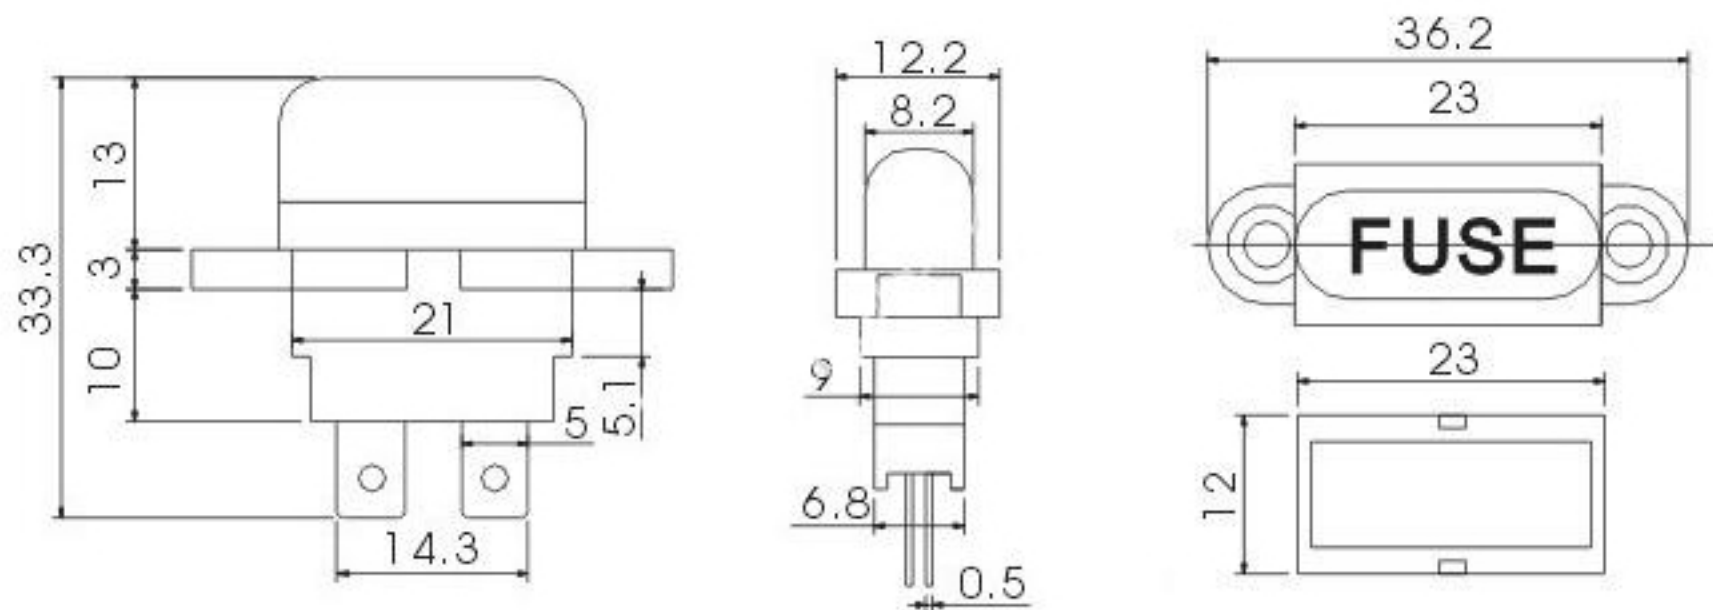

- **Electrical Characteristics**

For Fuse	Rated Amperage	Rated Voltage	Contact Resistance	Insulation Resistance	Dielectric Strength
ATO® 257	30A	DC48V	20mΩ	100 MΩ	1000VAC/60"

- Mounting on PCB And panel mounting
- Mounting: insert and solder
- **Color:** Black