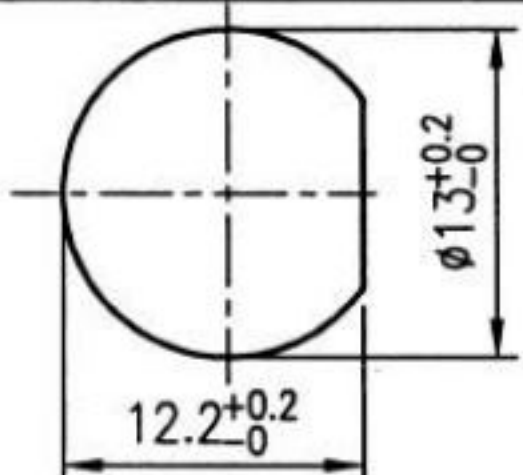


# Fuse holder

|                       |                             |                                                                                                        |                                                                                                             |
|-----------------------|-----------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Rating                | 10A 125V AC<br>6.3A 250V AC | C <del>UL</del> US  | <b>Mounting Hole</b><br> |
| Insulation Resistance | DC 500V 100M ohm Min        |                                                                                                        |                                                                                                             |
| Dielectric Strength   | AC 1500V 1 Minute           |                                                                                                        |                                                                                                             |
| Fuse Size             | ø5*20mm((0.197"*0.788"))    |                                                                                                        |                                                                                                             |

Material:

Frame:Black,Nylon#66(94V-0)

Cover:Black,Nylon#66(94V-0)

Terminal:Silver plated,Copper alloy

