
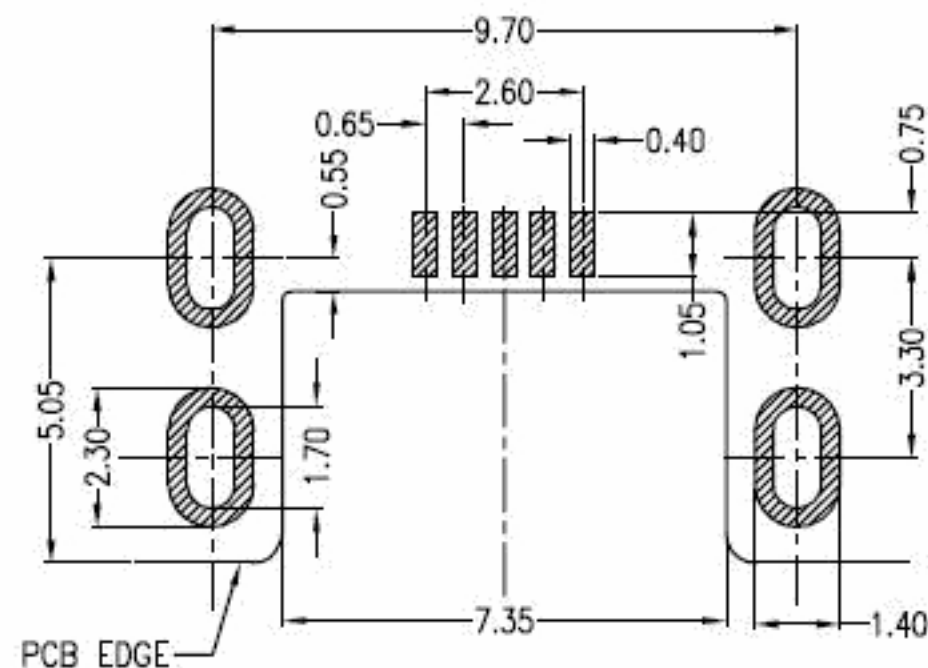
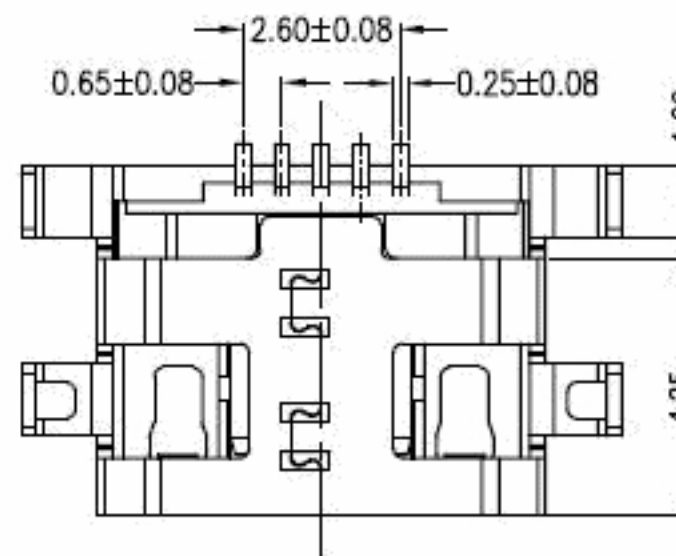
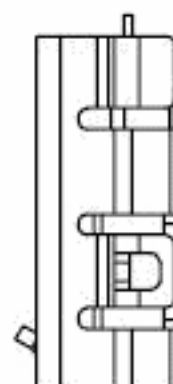
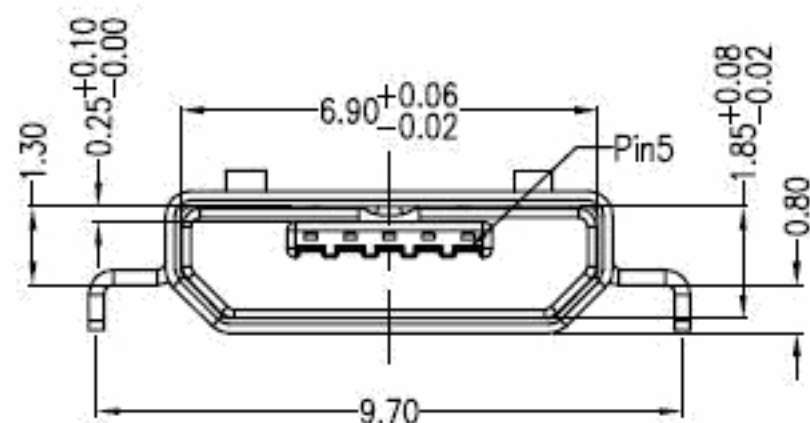
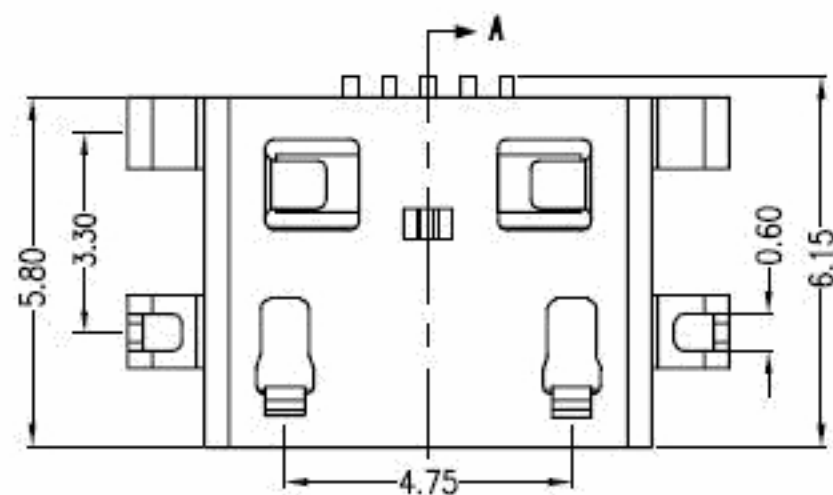
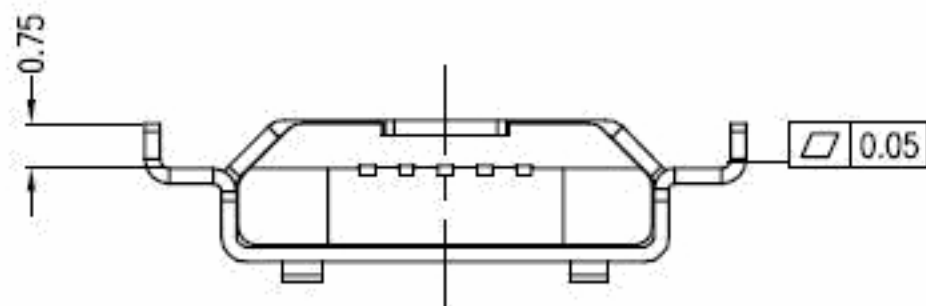


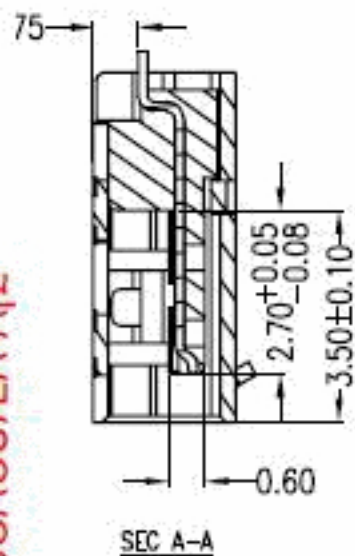

RECOMMENDED PCB LAYOUT

Note:

1. Material:

- 1.1 Housing: High temperature thermoplastic with g.f, UL94v-0
- 1.2 Contact: copper alloy, $t=0.15\text{mm}$
- 1.3 Shell: copper alloy, $t=0.25\text{mm}$

2. Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kg Max.
- 2.6 Total unmating force: 1.0 Kg Min.
- 2.7 Temperature range: $-30^{\circ}\text{C}\sim 80^{\circ}\text{C}$

PART NO: A01SB141B3-367		MATERIAL: SEE NOTE	
MODEL NO: XX		FINISH: SEE NOTE	
UNIT: MM	SIZE: A4	COLOR: SEE NOTE	TITLE: Micro usb 5s B Type Smt 沉板式0.8四脚全插无导位有孔
TOLERANCE UNSPECIFIED		DR: xiayouhong	
.x	0.15	CHK:	
.xx	0.10	APP:	
.xxx	0.05		DWG NO: A367
Ang	1°		SCALE: 5:1
			DATE: 2014.03.01
			REV: A