
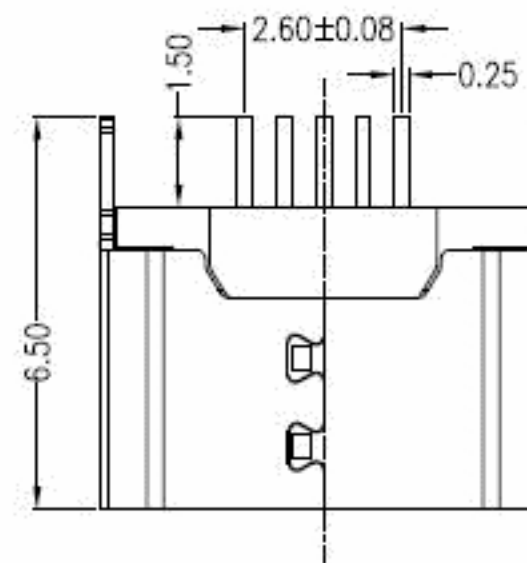
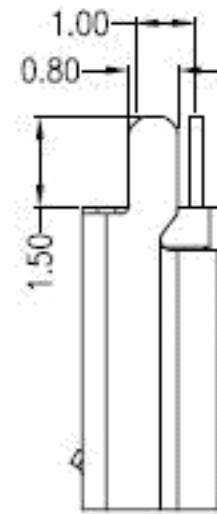
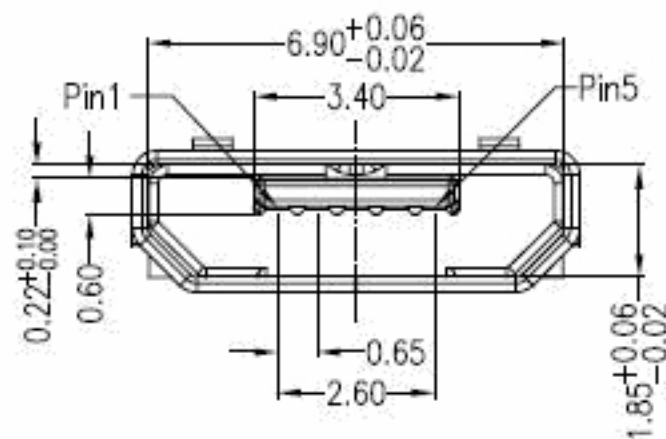


SECTION A-A

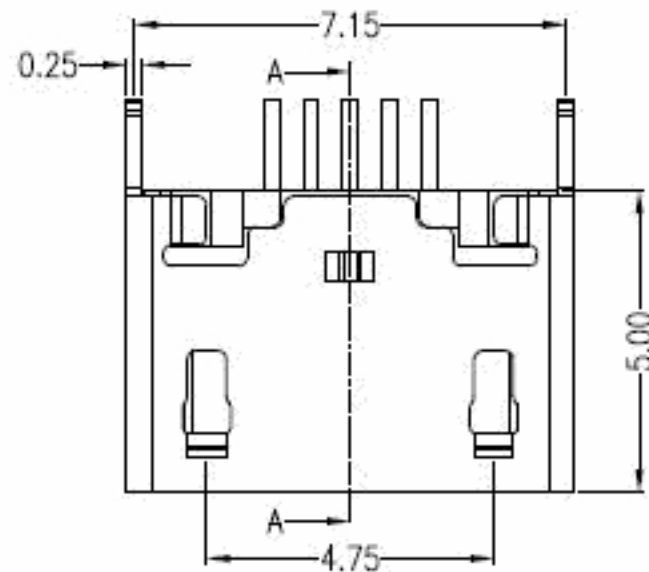


Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: SUS304,t=0.25mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

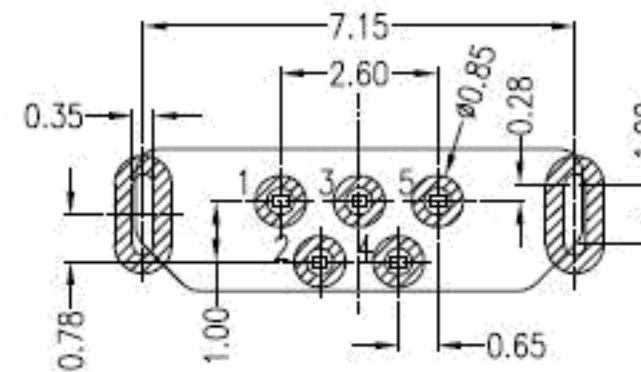

RECOMMENDED PCB LAYOUT

PCB图仅供参考

PART NO: A01SBXXXXXX-677		MATERIAL: SEE NOTE	
MODEL NO: XX		FINISH: SEE NOTE	
UNIT: MM	SIZE: A4	COLOR: SEE NOTE	TITLE: Micro usb 5s B型180度插板脚长1.5无导位
TOLERANCE UNSPECIFIED .x 0.15 .xx 0.10 .xxx 0.05 Ang 1°		DR: xiayouhong	DWG NO: A677
		CHK:	REV: A
		APP:	SCALE: 5:1
		DATE: 2016.06.18	