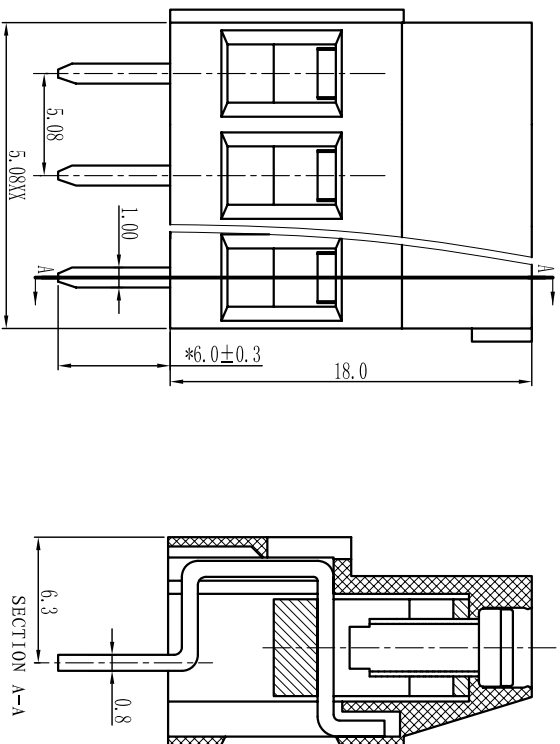


订购方式：
HOW TO ORDER

X	X	X
客	户	需
Customer		Request

尺寸/Dimensions
间距/Pitch: 7.62mm
极数/Poles: 2P-24P
材质及电镀/Material
塑件/Housing: PA66, UL94V-0
螺丝/Screws: M3, 0. steel Zinc plated
方块/Cage: Brass, Ni plated
焊脚/Pin header: Brass, Snle plated

电气性能/Electrical	
参考标准/Standard:	UL IEC
额定电压/Rated voltage:	300V 250V
额定电流/Rated current:	16A 25A
接触电阻/Contact resistance:	20m Ω
使用线径/Wire range:	26-12AWG 4.0mm ²
耐电压/Withstanding voltage:	AC2000V/Min
绝缘电阻/Insulation resistance:	500M Ω /DC5000V
机械性能/Mechanical	

	linear dimension				fillet	chamfer	$\sphericalangle$	short angle sid			$\equiv$	—	$\square$	//	$\perp$	
	over	over	over	over		over		over	over	over		over	over	over		
variable range	6	30	120	480	all	6		10	50	120	all	5	30	120		
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	± 1	1°	$30'$	$20'$	0.5	0.025	0.06	0.12	0.4

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	比例
----------	----	---------	----	----------	----

灰色/Grey	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	橙色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD	名称 / NAME	WJ29-XXP-1Y-00A
--	-----------	-----------------